



# Two-Sided, Single-Nip Web Cleaner

ContactClean™ Web by PolymagTek, Inc.

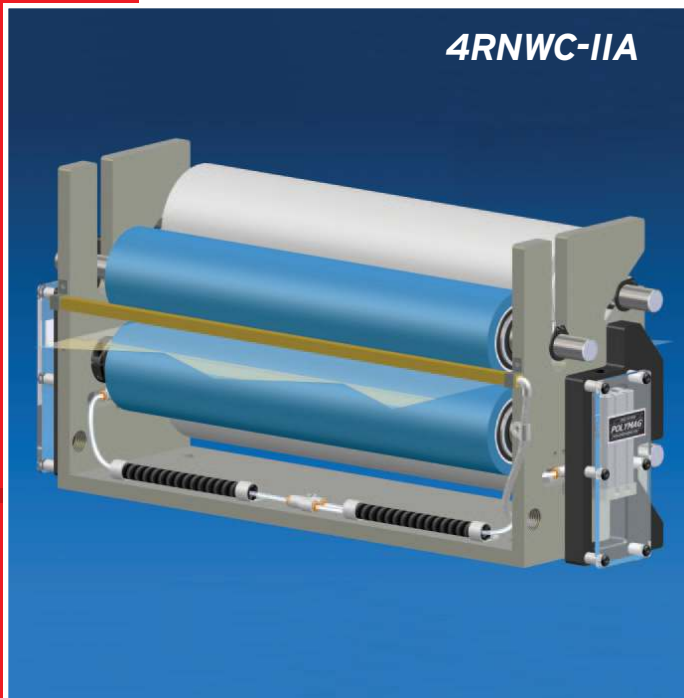

4RNWC-IIA

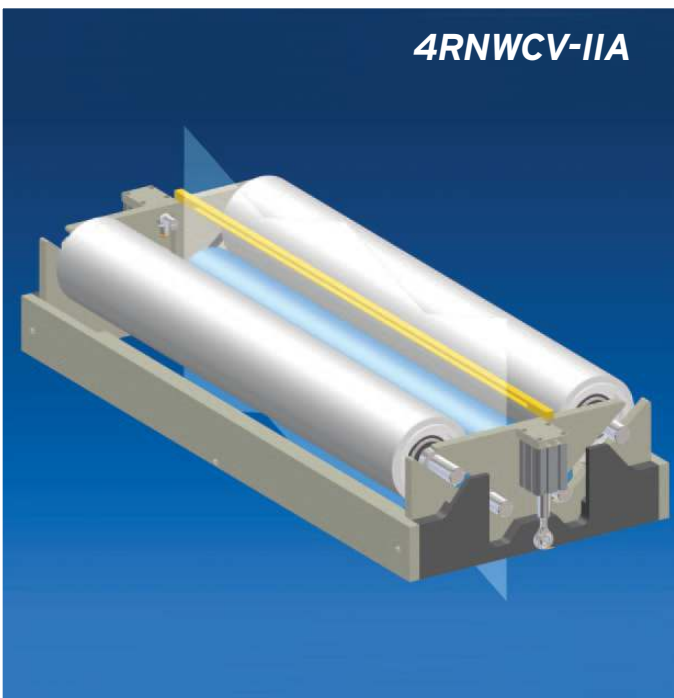

4RNWCV-IIA

The "workhorse" of the contact web cleaning world. Two-sided contact cleaning technology at a fraction of the cost. Simple, maintenance-free, industrial design with large Contact Cleaning Rolls (CCRs). Gravity nip. Maximum web tension loss equals 0.04 pli. Adaptable. Mount at various web angles up to 45°. Pneumatics package separate or engage rolls on stop/start. For "Stop & Go" applications

## Applications

- 2-sided cleaning
- "Stop & Go" processes
- Single-nip - up to 96.9% efficiency\*

## Features

- 2-sided, gravity, single-nip, open frame design
- 3.0" (76 mm) o.d. Contact Cleaning Rolls (CCRs)
- Pneumatic cylinders to separate rolls when machine stops
- Shafted tape mounting style
- "Quick Release" tape roll end cap
- Swiveling stainless steel tape baffle
- Static elimination for a solvent environment
- Nickel-plated, steel construction
- Baseplate mount
- Altered designs available



## Process Parameters

- Maximum speed 800 fpm (245 mpm)
- Web widths up to 59" (1500 mm)
- No tape change on the fly
- Horizontal web orientation to 45° incline (4RNWC-IIA)
- Vertical web orientation (4RNWCV-IIA)

## Options

- In-feed and/or exit idle rolls
- Extender™ tape roll oscillation
- In-feed static elimination bar
- Cantilevered baseplate mount designs available

\* Based upon results found in the Polymag Tek "Dirt Report"

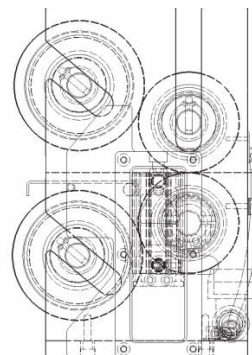

 **PolymagTek**  
INCORPORATED

[www.polymagtek.com](http://www.polymagtek.com)

Phone: 1.800.787.0830 • Fax: 585.235.8395  
215 Tremont Street, Rochester, NY 14608